

# VP-61MX-M/C 18 H

61MP Thermoelectric Peltier Cooled Camera



CoaXPress®

The VP-61MX-18 H, the latest model of the industrial proven VP series, is a new 61 megapixel CoaXPress camera and based on the latest CMOS image sensor technology (IMX455) from Sony Semiconductor Solutions Corporation. The VP-61MX-18 H offers up to 17.9 frames per second at 9568 × 6380 resolution. This camera uses thermo-electric Peltier (TEC) cooling technology developed for and used by many demanding medical market customers. The TEC maintains the operating temperature of the image sensor at up to 15 degrees below ambient temperature. The VP-61MX camera provides a stable operating condition and the ability to expose for a long period of time to increase the camera's sensitivity. Featuring high-speed and high-resolution with stable performance, this camera is ideal for demanding applications such as FPD, PCB and semiconductor inspections.

**VIEWWORKS**

vision.viewworks.com

# VP-61MX-M/C 18 H

61MP Thermoelectric Peltier Cooled Camera

## Main Features

- Thermoelectric Peltier Cooled – 15°C below
- 61 Megapixel Resolution
- CoaXPress Interface up to 17.9 fps at 25 Gbps using 4 CH
- Electronic Rolling Shutter
- DSNU and PRNU Correction
- Flat Field Correction with Sequencer Control
- Hot Pixel Correction

## Applications

- Flat Panel Display Inspection
- Electronics Inspection
- Semiconductor Inspection
- Document / Film Scanning



## Specifications

Model	VP-61MX-M/C 18 H	
Resolution (H × V)	9568 × 6380	
Sensor	SONY IMX455	
Max. Image Circle	Diagonal 43.3 mm (Type 2.7)	
Pixel Size	3.76 μm × 3.76 μm	
Interface	CoaXPress (CXP-3 / CXP-6)	
Max. Frame Rate	8/10/12 bit	17.93 fps
	14 bit	9.99 fps
	16 bit	3.98 fps
Exposure Time (2-Line step)	17.33 μs – 60 s	
Partial Scan (Max. Speed)	2057.6 fps at 4 Lines	
Binning	Sensor	×1, ×2, ×3 (Horizontal and Vertical Dependent, 8/10/12 bit only)
	Logic	×1, ×2, ×4 (Horizontal and Vertical Independent)
Pixel Data Format	Mono	Mono 8/10/12/14/16
	Color	RG Bayer 8/10/12/14/16
Electronic Shutter	Rolling Shutter	
Trigger Synchronization	Overlapped	Free-Run
	Non-overlapped	Hardware Trigger, Software Trigger, CXP or User Output0
External Trigger	3.3 V ~ 24.0 V, 10 mA, Logical Level Input, Optically Isolated	
Software Trigger	Asynchronous, Programmable via Camera API	
Dynamic Range	78 dB	
Gain Control	Analog	1× ~ 32×
	Digital	1× ~ 32×
Black Level Control	0 ~ 1023 LSB at 16 bit	
Cooling Method	Thermoelectric Peltier Cooling	
Cooling Performance	15°C below Ambient Temperature – Standard Cooling with a Fan	
Dimension / Weight	80.0 mm × 80.0 mm × 154.6 mm, 1070 g (with F-mount)	
Temperature	Operating: 0°C ~ 40°C, Storage: -40°C ~ 70°C	
Lens Mount	F-mount, Custom Mount Available upon Request	
Power	External	11 ~ 24 V DC
	Dissipation	Typ. 28.0 W
Compliance	CE, FCC, KC (in preparation)	
API SDK	Vieworks Imaging Solution 7.X	


# VP-61MX-M/C 18 H

61MP Thermoelectric Peltier Cooled Camera

## Relative Sensitivity Curves

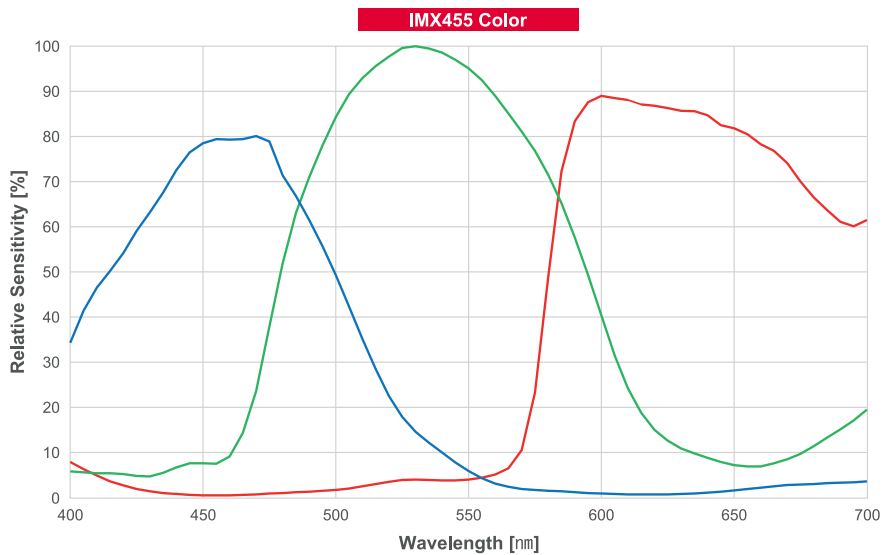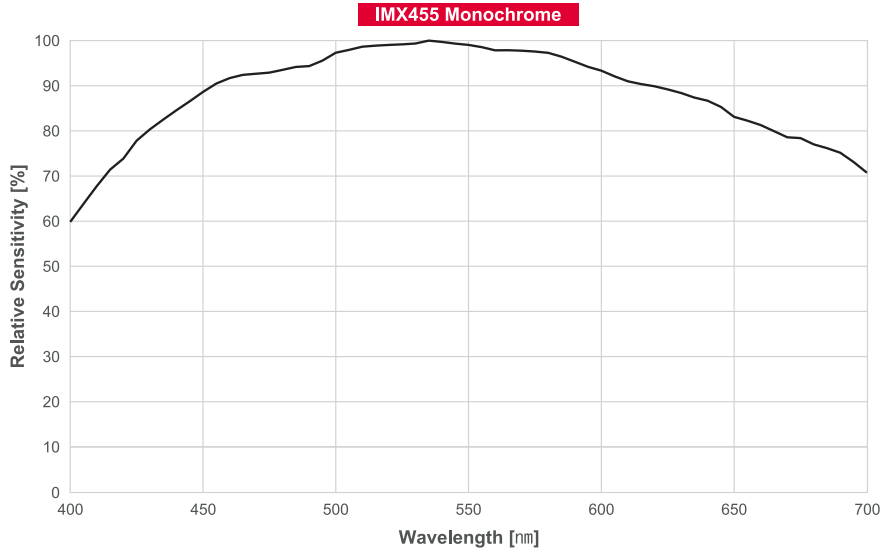


## Ordering Scheme

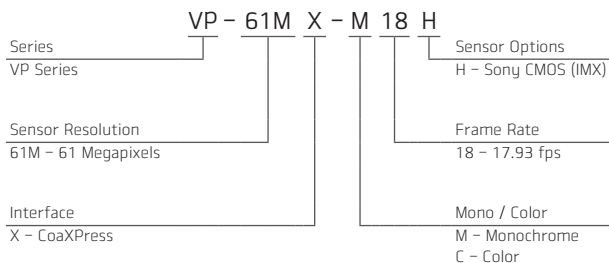


## Connector Specification

### Power




1, 2, 3: +12V DC  
4, 5, 6: GND  
(HR10A-7R-6PB)

### Control



1: Trigger IN+  
2: Trigger IN-  
3: Strobe OUT-(GND)  
4: Strobe OUT+  
(HR10A-7R-4S)

### Data Transfer / Communications



CH1 CH2 CH3 CH4

CH1: Master Connection  
75 Ω, DIN 1.0/2.3

Connectors on Camera Body

# VP-61MX-M/C 18 H

61MP Thermoelectric Peltier Cooled Camera

## Mechanical Dimensions

Unit: mm

